

PRODUCT DATA SHEET

Friction Fighter-LB-S

---ANIONIC POWDERED FRICTION REDUCER ADDITIVE---

GENERAL INFORMATION

Friction Fighter-LB-S is a powdered, high molecular weight polyacrylamide copolymer used to reduce friction pressure or build viscosity in pressure pumping applications. This product is >90% active as opposed to typical polyacrylamide emulsions or slurries that are 15-60% active. This translates into a potentially significant cost savings over standard FR products.

PRINCIPLE USES

When Friction Fighter-LB-S is added to water in low concentrations, it reduces the friction pressure associated with high flow rates. This enables higher flow rates to be achieved, particularly in slick water or coiled tubing applications. Friction Fighter-LB-S is effective in brines up to 50,000 TDS. Friction Fighter-LB-S will build excellent low shear viscosity in low TDS water as compared to many emulsion products.

PROPERTIES

Appearance	White Powder
Particle Size	95% through 100 Mesh
Ionic Charge:	Anionic

LOADING AND DOSAGE

Recommended loading levels are 0.75-4.0 ppt in water. A load rate of <2.5 ppt of Friction Fighter-LB-S will be equivalent to 1 gpt of most standard polyacrylamide emulsion friction reducers. For optimum performance, this product must be dispersed thoroughly before pumping downhole. High shear mixing equipment is recommended.

Fig 1. Friction Fighter-LB-S Flow Loop Performance in 1k TDS Water at Various Loadings

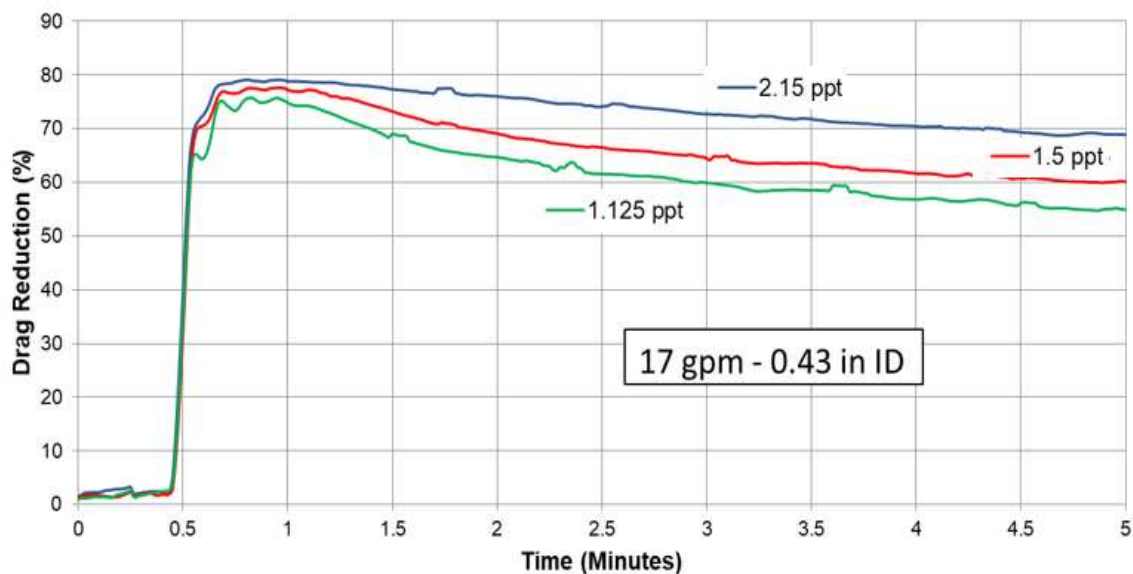


Fig 2. Friction Fighter-LB-S Flow Loop Performance in 10k TDS Water at Various Loadings Compared to Standard 1.0 gpt Emulsion


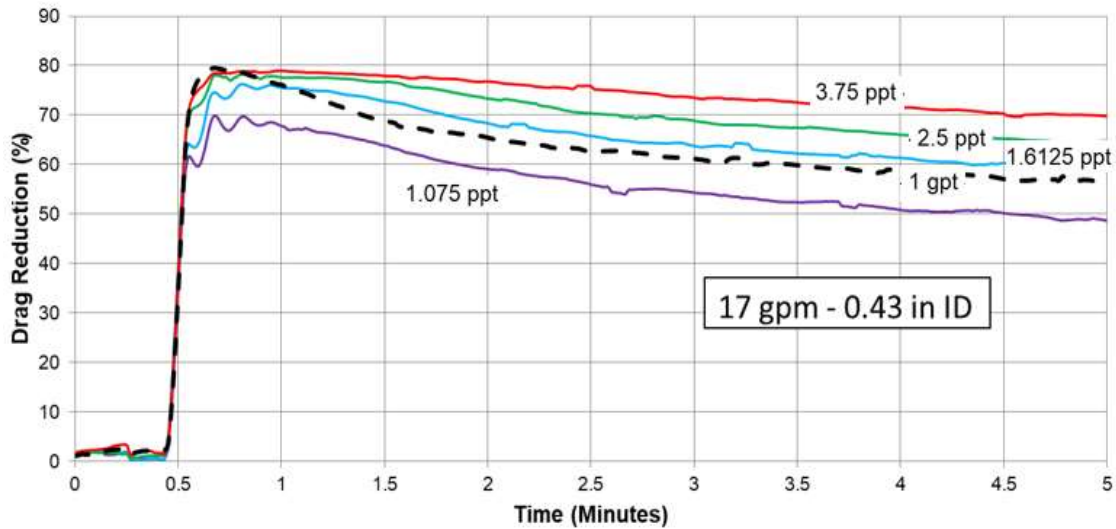


Fig 3. Friction Fighter-LB-S Viscosity Profiles at Various Loadings and Shear Rates

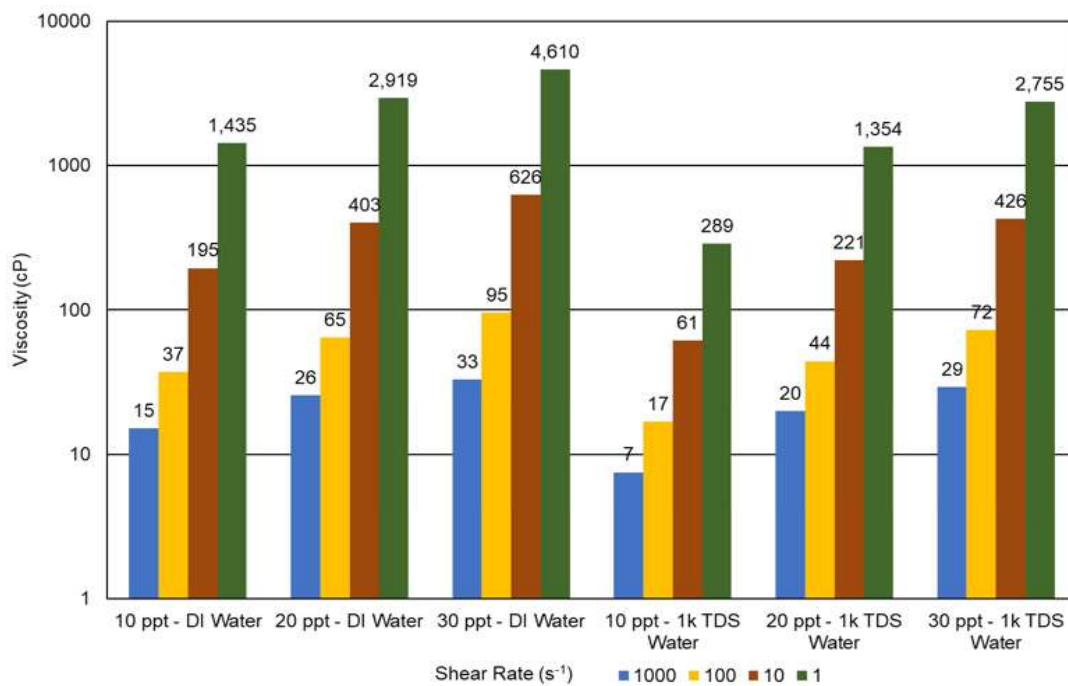

STORAGE

Friction Fighter-LB-S should be kept in cool, dry conditions to keep from absorbing water from the atmosphere over time. The package should be kept closed when not in use. Keep this product away from moisture.

This information is provided with the best of our knowledge and belief. It is user’s responsibility to satisfy himself as to the suitability of such information for his own particular use. However, no representation, warranty or guarantee is made as to its accuracy, reliability. We do not accept liability for any loss or damage that may occur from the used of this information nor do we offer any warranty against any patent infringement.